


PD2112 - POWER DIVIDER/COMBINER

12 Way, SMA Female, 0.7-2.7 GHz, 40 Watts, RoHS



true 12 way SMA splitter with broadband RF performance

- Wideband Frequency (700 - 2700 MHz)
- Low Insertion Loss (0.8 dB avg)
- High Port to Port Isolation (30 dB avg)
- Excellent VSWR (1.15 : 1 avg)
- RoHS Compliant Splitter Construction
- SMA Female (Jack) 50 Ohm Coax Conn



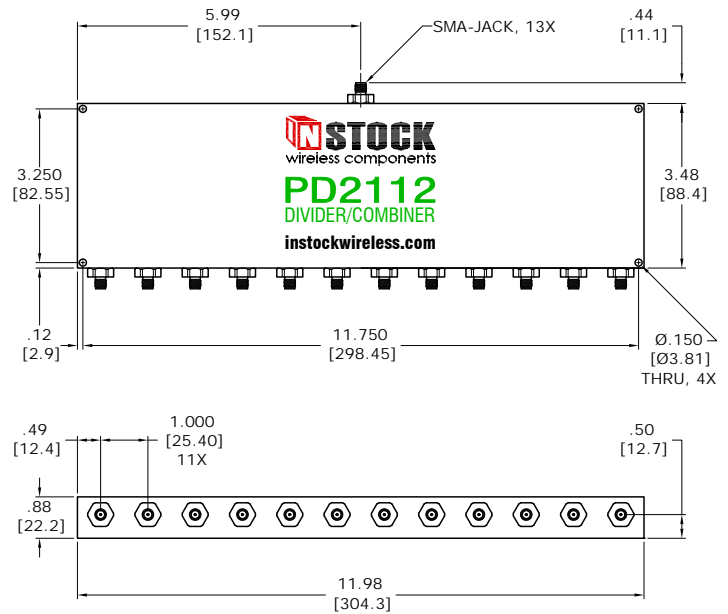


12 Way Power Divider Input Ratings		
Into Matched Load VSWR's	In-Phase	180° Out-of-Phase
1.2 : 1	40 Watts	40 Watts
2.0 : 1	40 Watts	40 Watts
∞	20 Watts	4 Watts
12 Way Power Combiner Input Ratings		
Input Signals	In-Phase	180° Out-of-Phase
Coherent	12 X 3.33 Watts	12 X 0.33 Watts
Non-Coherent	12 X 0.66 Watts	

Mechanical Specifications

Circuit Design Wilkinson Microstrip passes DC Current thru all ports
 Connectors SMA Female, 50 Ohm, 13X
 Body Brass, Tri-Alloy Plate
 Connector Pin Beryllium Copper, Gold Plate
 Insulator PTFE, Virgin Electrical Grade
 Housing Aluminum, Clear Chem Film
 Operating Temp -65°C to +85°C
 Weight 1200 Grams

Frequency Range	Insertion Loss (above 10.79 dB)	Amplitude Balance	Phase Balance	Isolation	Input VSWR	Output VSWR
0.7 - 2.7 GHz	1.5 dB max	0.5 dB max	8° max	18 dB min	1.45 : 1 max	1.25 : 1 max

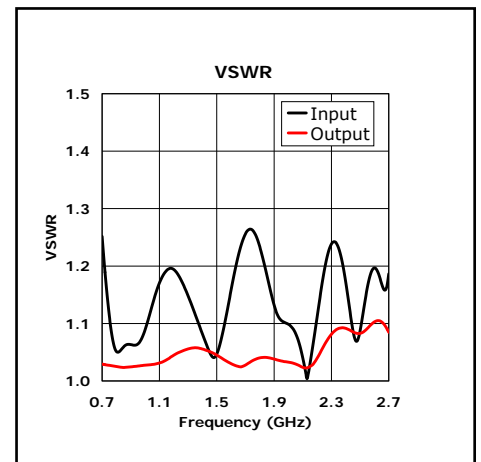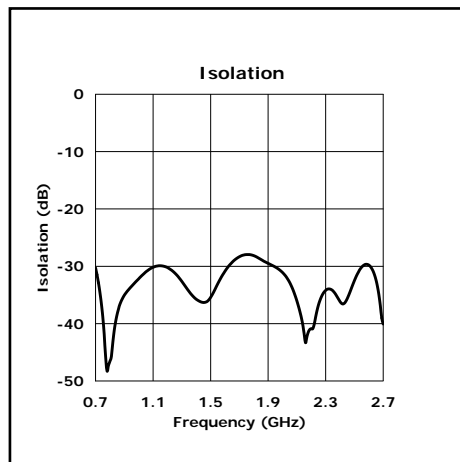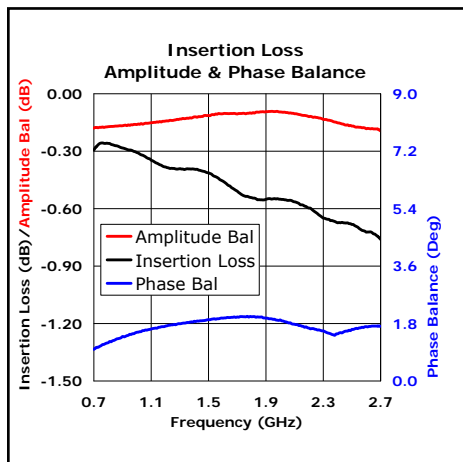

50 Intervale Road
 Boonton, NJ 07005 USA
 ph: 973.335.6550
 fx : 973.335.6770
 email: sales@instockwireless.com
 web: www.instockwireless.com

INSTOCK
 wireless components
Better Products. Better Prices.

- design
- manufacture
- direct sales