


# PD1130 - POWER DIVIDER/COMBINER

## 3-Way, SMA-Jack, 0.7-2.7 GHz, 40 Watts



precision designed & etched microstrip circuit

- Broadband Frequency (0.7 - 2.7 GHz)
- Low Insertion Loss (0.3 dB avg)
- High Isolation (30 dB avg)
- Excellent VSWR (1.10 : 1 avg)
- Tri-Alloy Plated Connectors for Low PIM



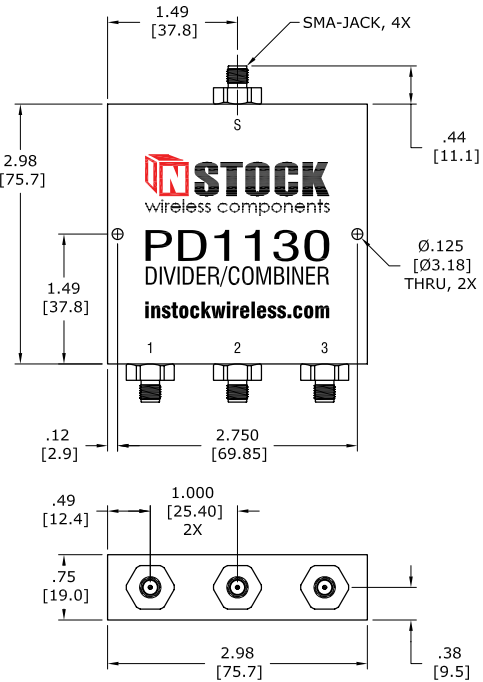


### Mechanical Specifications

- Connectors ..... SMA-Jack, 4X
- Body ..... Brass, Tri-Alloy Plate
- Connector Pin ..... Beryllium Copper, Gold Plate
- Insulator ..... PTFE, Virgin Electrical Grade
- Housing ..... Aluminum, Yellow Iridite
- Operating Temp ..... -65°C to +85°C
- Weight ..... 246 Grams

Power Divider Input Ratings		
Into Matched Load VSWR's	In-Phase	180° Out-of-Phase
1.2 : 1	40 Watts	40 Watts
2.0 : 1	40 Watts	10 Watts
∞	20 Watts	1 Watt
Power Combiner Input Ratings		
Input Signals	In-Phase	180° Out-of-Phase
Coherent	3 X 13.3 Watts	3 X 0.33 Watts
Non-Coherent	3 X 0.66 Watts	

Frequency Range	Insertion Loss (above 4.77 dB)	Amplitude Balance	Phase Balance	Isolation	Input VSWR	Output VSWR
0.7 - 2.7 GHz	0.7 dB max	0.3 dB max	4° max	22 dB min	1.30 : 1 max	1.15 : 1 max

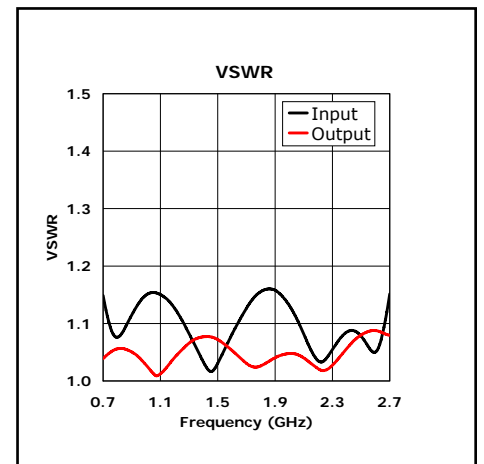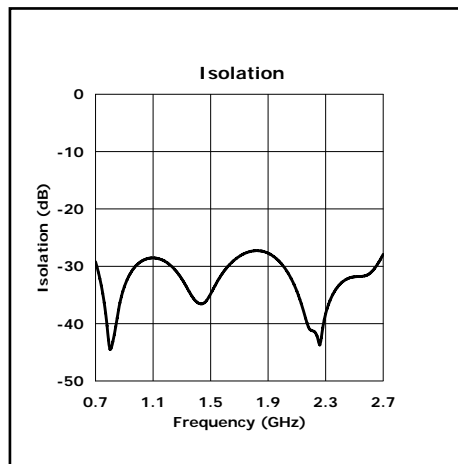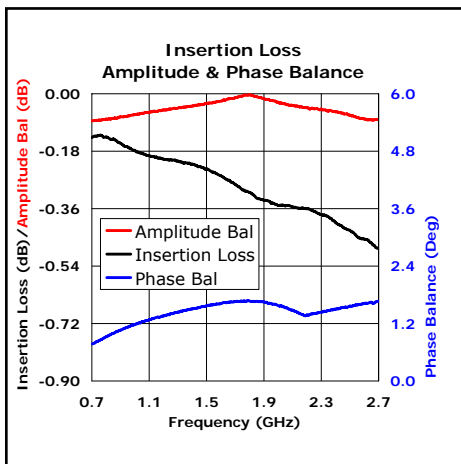

50 Intervale Road  
 Boonton, NJ 07005 USA  
 ph: 973.335.6550  
 fx : 973.335.6770  
 email: sales@instockwireless.com  
 web: www.instockwireless.com



- design
- manufacture
- direct sales