

Your vendor's license to steal is about to expire.

BUSTED!



2-Way, 0.7-2.7 GHz, 40 Watts



N and SMA-Jack Connectors

Four power divider-combiner models from \$39.99.

(qty 10)

50 Intervale Road
Boonton, NJ 07005 USA
ph: 973.335.6550
fx: 973.335.6770
www.instockwireless.com

IN STOCK
wireless components
Better Products. Better Prices.


- design
- manufacture
- direct sales

6-WAY POWER DIVIDER/COMBINER

0.7-2.7 GHz, 40 Watts, N & SMA-Jack Connectors




6-Way, N-Jack Connectors

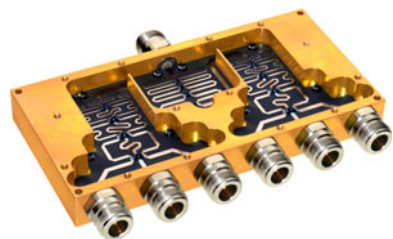

precision microstrip circuit



6-Way, SMA-Jack Connectors

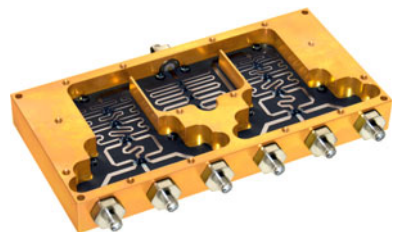

fully-shielded CNC-housing

Application Note

instock 6-Way Power Divider, Power Combiners are available with two connector styles, N-Jack and SMA-Jack. Both models are optimized for broadband operation covering the frequency range from 0.7– 2.7 GHz with outstanding electrical performance. These Wilkinson-type, 6-way, power divider, power combiners are reciprocal units that can be used to divide or combine signals with equal facility.

In power divider applications, the input signal is equally split into six output signals, each down 7.78 dB from the incident due to the 6 x 1/6th power division. No power is actually lost from this power split; it is just allocated into six amplitude and phase matched signals, thus a so-called 7.78 dB insertion loss. True insertion loss of less than 1.1 dB max @ 2.7 GHz will be found at the output ports resulting from dissipation of small amounts of RF & microwave energy within the connectors and microstrip circuit. The output signals are isolated from each other by 22 dB minimum through the use of resistors that dissipate any power reflected back to the circuit caused by unequal or unbalanced output loads. The 40 watt maximum power rating of these power dividers is applicable when connected to


matched output load VSWR's of 1.2:1 or better. This maximum power rating must be reduced when load VSWR's increase or are unbalanced or out-of-phase with respect to one another. See **Power Divider Input Rating Tables** for additional guidelines.

The situation with power combining is a bit more complex. While it is possible to sum six input signals with no loss, this can only be accomplished if the input signals are coherent and identical in phase and amplitude. Such a

case would be the 6-way splitting of a signal which is then recombined after amplification, provided the amplified signals are

phase-locked together. But outside this case, or cases of pure sine signals, or CW signals without any transmitted info, the combining of six non-coherent signals will result in a minimum 7.78 dB loss (1/6th power ratio) plus the true insertion loss of the power combiner (1.1 dB max @ 2.7 GHz). Worst-case combining loss occurs with coherent signals 180° out-of-phase, where all power is dissipated. Because the combining loss is dissipated through the isolation resistors, it is the power handling capability of these resistors that ultimately determines the combiner power rating. See **Power Combiner Input Rating Tables** for more information.

Model Number	Connectors
PD1060	N-Jack
PD1160	SMA-Jack

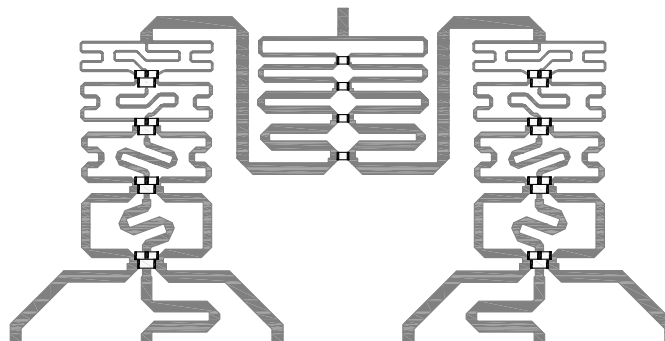

6-Way Power Divider, Power Combiner Circuit

- design
- manufacture
- direct sales

instock
wireless components
Better Products. Better Prices.

50 Intervale Road
Boonton, NJ 07005 USA
ph: 973.335.6550
fx: 973.335.6770
email: sales@instockwireless.com
web: www.instockwireless.com

6-WAY POWER DIVIDER/COMBINER


0.7-2.7 GHz, 40 Watts, N & SMA-Jack Connectors

N-Jack Connectors



designed for optimum broadband performance

PD1060 is a broadband 6-way power divider, power combiner furnished with N-Jack connectors. All wireless-band frequencies from 0.7 - 2.7 GHz are covered with optimum performance. Input power levels up to 40 watts can be handled in both power divider and power combiner scenarios. See **Power Input Rating Tables** for specifics.

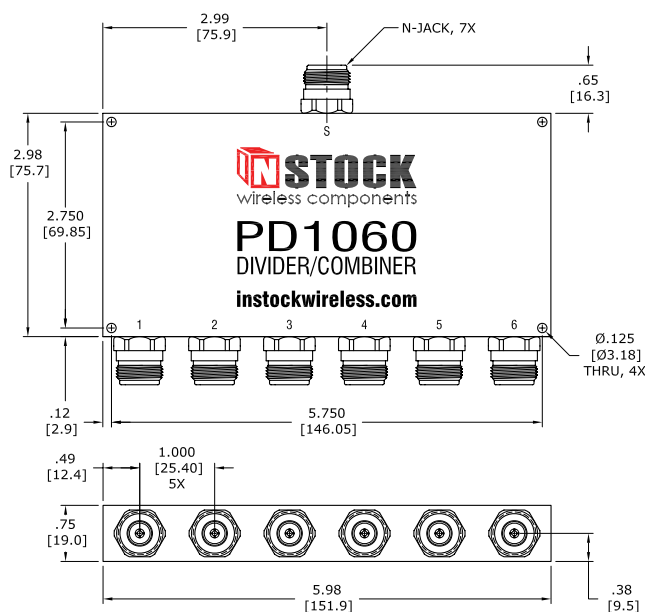


SMA-Jack Connectors



true 6-way power split and balance

PD1160 is a true 6-way power divider, power combiner with equal power split and balance. Electrical performance is highlighted by 1.1 dB max insertion loss, 22 dB min isolation, 1.35:1 max input VSWR and 1.20:1 max output VSWR. Narrow band performance may be even better. See **Power Divider Test Sweeps** for specific details.

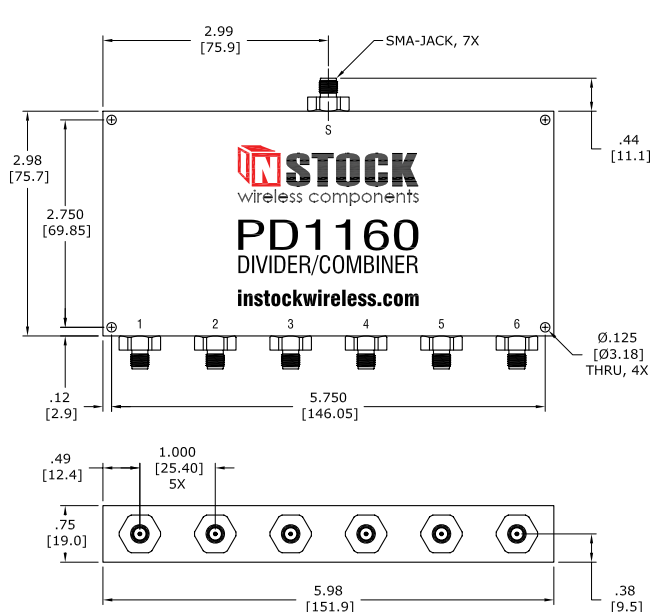

Model No.	Connectors	Frequency Range	Insertion Loss (above 7.78 dB)	Amplitude Balance	Phase Balance	Isolation	Input VSWR	Output VSWR
PD1060	N-Jack	0.7-2.7 GHz	1.1 dB max	0.4 dB max	6° max	22 dB min	1.35:1 max	1.20:1 max
PD1160	SMA-Jack	0.7-2.7 GHz	1.1 dB max	0.4 dB max	6° max	22 dB min	1.35:1 max	1.20:1 max

50 Intervale Road
Boonton, NJ 07005 USA
ph: 973.335.6550
fx : 973.335.6770
email: sales@instockwireless.com
web: www.instockwireless.com

INSTOCK
wireless components
Better Products. Better Prices.

■ design
■ manufacture
■ direct sales

PD1060 - POWER DIVIDER/COMBINER

6-Way, N-Jack, 0.7-2.7 GHz, 40 Watts

Features & Benefits



true 6-way equal power split and balance

Overview

PD1060 is a broadband, 6-way, power divider, power combiner furnished with N-Jack connectors. All wireless-band frequencies from 0.7 - 2.7 GHz are covered with optimal performance. Input power levels up to 40 watts can be handled in both power divider and power combiner applications. See **input power rating tables** for specific details.

Electrical

The heart of the unit is a precision designed and etched microstrip circuit on a low-loss, high frequency, dielectric substrate. A true 6-way power divider, power combiner with equal power split and balance, the PD1060's electrical performance is highlighted by 1.1 dB max insertion loss (above the 7.78 dB power split), 18 dB min isolation, 140:1 max input VSWR and

1.20:1 max output VSWR. Equal power split and balance is displayed by 0.3 dB max amplitude balance and 5 degrees max phase balance. Narrow band performance over your frequency range may be even better. See **power divider test sweeps** for specific details.

Mechanical

Mechanical features include precision CNC machined, brass, N-Jack connectors with tri-alloy plating to insure tarnish resistance and low-PIM operation. Connector pins are gold plated phosphor bronze for reliability and low contact resistance. Virgin electrical grade PTFE insulators support the contact pins enabling high withstand voltage. Long-term operation and superior shielding is maintained by the rugged CNC-machined aluminum housing with yellow iridite finish. Secure mounting is provided by four 0.125 in. diameter (3.18 mm) through holes.

Physical

Housing dimensions are 5.98 in. wide by 2.98 in. deep by 0.75 in. high (151.9 x 75.7 x 19.1 mm). The N-Jack connectors extend 0.65 in. (16.5 mm) from the housing. Weight is 567 grams. Operating temperature range is from -65°C to +85°C. See **power divider outline drawing** for more information.

Warranty

Each unit is 100% electrically tested to insure complete compliance with all specifications. The PD1060 power divider, power combiner is covered by a **two-year warranty**.


- design
- manufacture
- direct sales

INSTOCK
wireless components
Better Products. Better Prices.

50 Intervale Road
Boonton, NJ 07005 USA
ph: 973.335.6550
fx: 973.335.6770
email: sales@instockwireless.com
web: www.instockwireless.com


PD1060 - POWER DIVIDER/COMBINER

6-Way, N-Jack, 0.7-2.7 GHz, 40 Watts

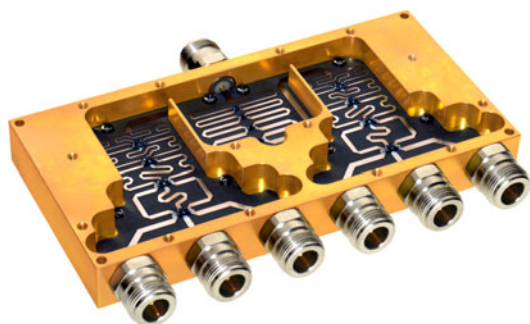

precision designed & etched microstrip circuit

- Broadband Frequency (0.7 - 2.7 GHz)
- Low Insertion Loss (0.5 dB avg)
- High Isolation (30 dB avg)
- Excellent VSWR (1.15 : 1 avg)
- Tri-Alloy Plated Connectors for Low PIM



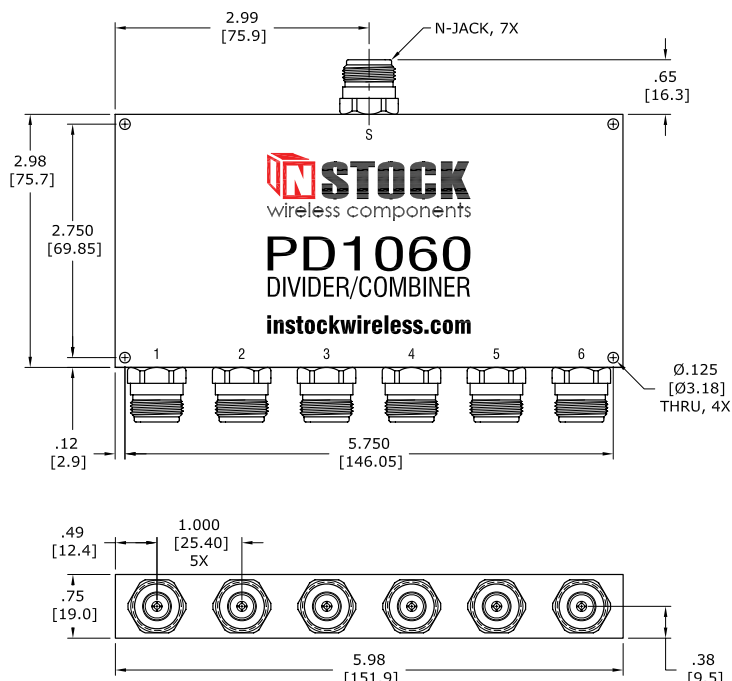


Mechanical Specifications

Connectors N-Jack, 7X
 Body Brass, Tri-Alloy Plate
 Connector Pin Phosphor Bronze, Gold Plate
 Insulator PTFE, Virgin Electrical Grade
 Housing Aluminum, Yellow Iridite
 Operating Temp -65°C to +85°C
 Weight 567 Grams

Power Divider Input Ratings		
Into Matched Load VSWR's	In-Phase	180° Out-of-Phase
1.2 : 1	40 Watts	40 Watts
2.0 : 1	40 Watts	20 Watts
∞	20 Watts	4 Watts
Power Combiner Input Ratings		
Input Signals	In-Phase	180° Out-of-Phase
Coherent	6 X 6.67 Watts	6 X 0.66 Watts
Non-Coherent	6 X 1.33 Watts	

Frequency Range	Insertion Loss (above 7.78 dB)	Amplitude Balance	Phase Balance	Isolation	Input VSWR	Output VSWR
0.7 - 2.7 GHz	1.1 dB max	0.3 dB max	5° max	18 dB min	1.40 : 1 max	1.20 : 1 max

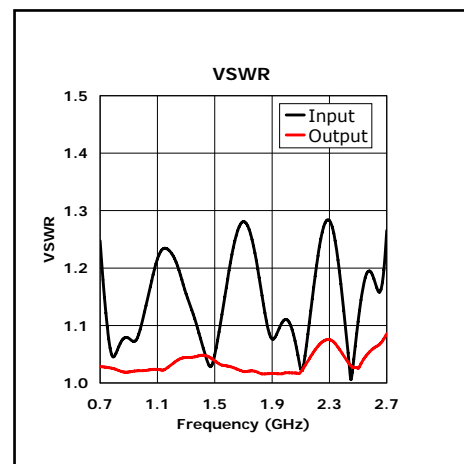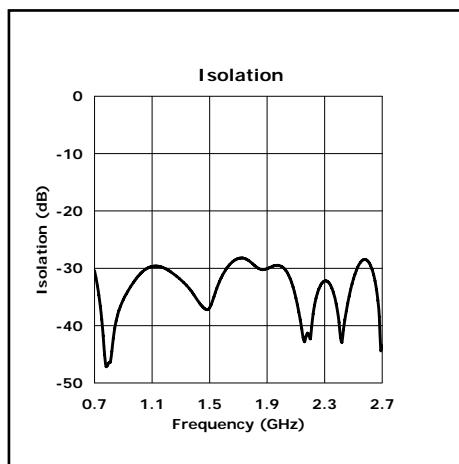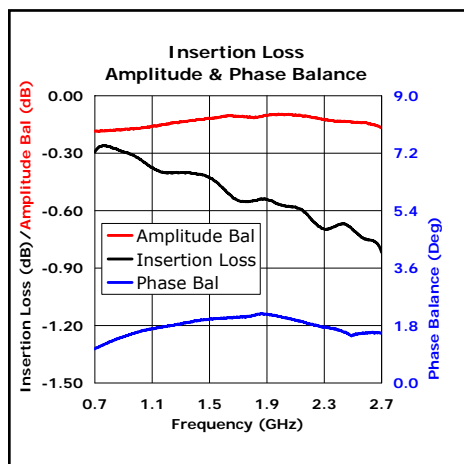

50 Intervale Road
 Boonton, NJ 07005 USA
 ph: 973.335.6550
 fx : 973.335.6770
 email: sales@instockwireless.com
 web: www.instockwireless.com

INSTOCK
 wireless components
Better Products. Better Prices.

- design
- manufacture
- direct sales

PD1160 - POWER DIVIDER/COMBINER

6-Way, SMA-Jack, 0.7-2.7 GHz, 40 Watts

Features & Benefits



true 6-way equal power split and balance

Overview

PD1160 is a broadband, 6-way, power divider, power combiner furnished with SMA-Jack connectors. All wireless-band frequencies from 0.7 - 2.7 GHz are covered with optimal performance. Input power levels up to 40 watts can be handled in both power divider and power combiner applications. See **input power rating tables** for specific details.

Electrical

The heart of the unit is a precision designed and etched microstrip circuit on a low-loss, high frequency, dielectric substrate. A true 6-way power divider, power combiner with equal power split and balance, the PD1160's electrical performance is highlighted by 1.1 dB max insertion loss (above the 7.78 dB power split), 18 dB min isolation, 1.40:1 max input VSWR and

1.20:1 max output VSWR. Equal power split and balance is displayed by 0.3 dB max amplitude balance and 5 degrees max phase balance. Narrow band performance over your frequency range may be even better. See **power divider test sweeps** for specific details.

Mechanical

Mechanical features include precision CNC machined, brass, SMA-Jack connectors with tri-alloy plating to insure tarnish resistance and low-PIM operation. Connector pins are gold plated beryllium copper for reliability and low contact resistance. Virgin electrical grade PTFE insulators support the contact pins enabling high withstand voltage. Long-term operation and superior shielding is maintained by the rugged CNC-machined aluminum housing with yellow iridite finish. Secure mounting is provided by four 0.125 in. diameter (3.18 mm) through holes.

Physical

Housing dimensions are 5.98 in. wide by 2.98 in. deep by 0.75 in. high (151.9 x 75.7 x 19.1 mm). The SMA-Jack connectors extend 0.44 in. (11.1 mm) from the housing. Weight is 471 grams. Operating temperature range is from -65°C to +85°C. See **power divider outline drawing** for more information.

Warranty

Each unit is 100% electrically tested to insure complete compliance with all specifications. The PD1160 power divider, power combiner is covered by a **two-year warranty**.


- design
- manufacture
- direct sales

iStock
wireless components
Better Products. Better Prices.

50 Intervale Road
Boonton, NJ 07005 USA
ph: 973.335.6550
fx: 973.335.6770
email: sales@instockwireless.com
web: www.instockwireless.com


PD1160 - POWER DIVIDER/COMBINER

6-Way, SMA-Jack, 0.7-2.7 GHz, 40 Watts

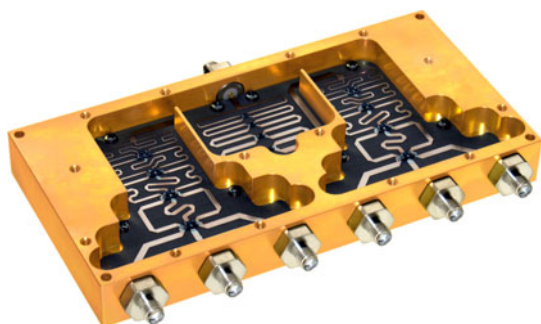

precision designed & etched microstrip circuit

- Broadband Frequency (0.7 - 2.7 GHz)
- Low Insertion Loss (0.5 dB avg)
- High Isolation (30 dB avg)
- Excellent VSWR (1.15 : 1 avg)
- Tri-Alloy Plated Connectors for Low PIM



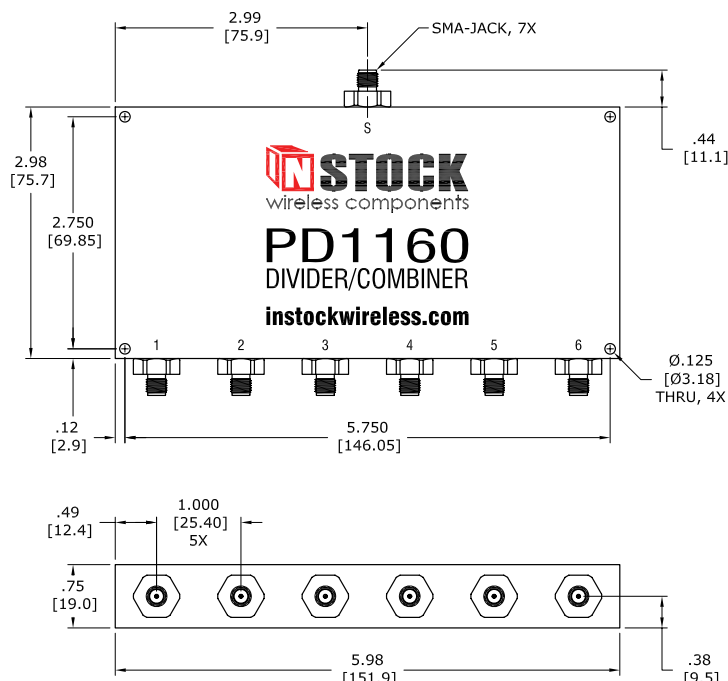


Mechanical Specifications

Connectors SMA-Jack, 7X
 Body Brass, Tri-Alloy Plate
 Connector Pin Beryllium Copper, Gold Plate
 Insulator PTFE, Virgin Electrical Grade
 Housing Aluminum, Yellow Iridite
 Operating Temp -65°C to +85°C
 Weight 471 Grams

Power Divider Input Ratings		
Into Matched Load VSWR's	In-Phase	180° Out-of-Phase
1.2 : 1	40 Watts	40 Watts
2.0 : 1	40 Watts	20 Watts
∞	20 Watts	4 Watts
Power Combiner Input Ratings		
Input Signals	In-Phase	180° Out-of-Phase
Coherent	6 X 6.67 Watts	6 X 0.66 Watts
Non-Coherent	6 X 1.33 Watts	

Frequency Range	Insertion Loss (above 7.78 dB)	Amplitude Balance	Phase Balance	Isolation	Input VSWR	Output VSWR
0.7 - 2.7 GHz	1.1 dB max	0.3 dB max	5° max	18 dB min	1.40 : 1 max	1.20 : 1 max

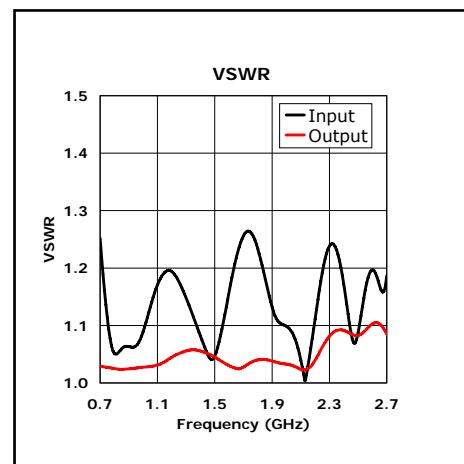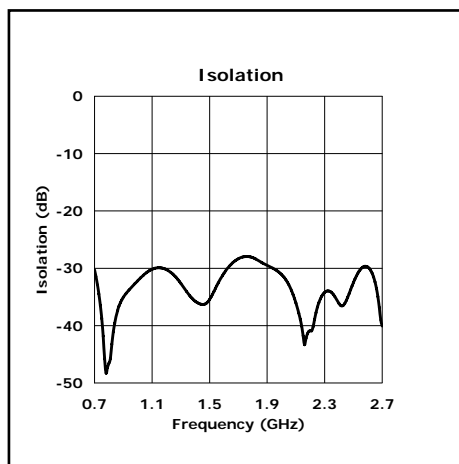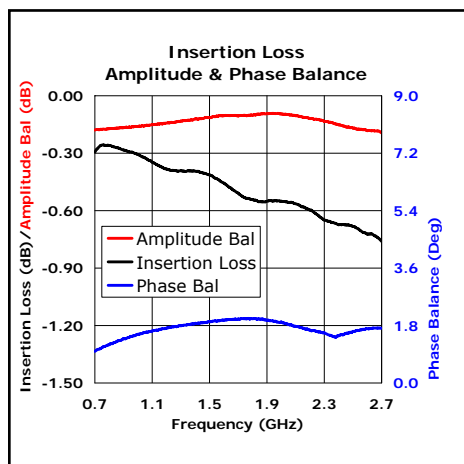

50 Intervale Road
 Boonton, NJ 07005 USA
 ph: 973.335.6550
 fx : 973.335.6770
 email: sales@instockwireless.com
 web: www.instockwireless.com

INSTOCK
 wireless components
 Better Products. Better Prices.

design
 manufacture
 direct sales