

ELECTRICAL SPECIFICATIONS:

- 1.) FREQUENCY RANGE: 1000 - 2000 MHz
- 2.) IMPEDANCE: 50 OHMS
- 3.) INSERTION LOSS (MAX): 0.6 dB (ABOVE 6.02 dB SPLIT)
- 4.) AMPLITUDE BALANCE (MAX): 0.3 dB
- 5.) PHASE BALANCE (MAX): 3 DEGREES
- 6.) ISOLATION (MIN): 22 dB
- 7.) INPUT VSWR (MAX): 1.30 : 1
- 8.) OUTPUT VSWR (MAX): 1.20 : 1
- 9.) DC VOLTAGE (MAX): 10 V
- 10.) DC CURRENT (MAX): 50 mA

MECHANICAL SPECIFICATIONS:


- 1.) CONNECTORS: SMA & TYPE N FEMALE (JACK), 50 OHM
- 2.) CONNECTOR BODY: BRASS, TRI-ALLOY PLATE
- 3.) CONNECTOR PIN: BE CU & PHOSPHOR BRONZE, GOLD PLATE
- 4.) INSULATOR: PTFE, VIRGIN ELECTRICAL GRADE
- 5.) HOUSING: ALUMINUM, CLEAR CHEM CONVERSION FILM, RoHS COMPLIANT (NO HEX CHROM)
- 6.) SOLDER: LEAD FREE, RoHS COMPLIANT
- 7.) OPERATING TEMP: -65°C TO +85°C
- 8.) WEIGHT: 396 GRAMS

GPS INPUT POWER RATING (GPS DIVIDER SPLITTER):

| INTO MATCHED LOAD VSWR's | IN-PHASE | 180° OUT-OF-PHASE |
|--------------------------|----------|-------------------|
| 1.2 : 1 | 20 WATTS | 20 WATTS |
| 2.0 : 1 | 20 WATTS | 10 WATTS |
| ∞ | 10 WATTS | 1 WATT |

GPS INPUT POWER RATING (GPS COMBINER):

| | |
|--------------------------------------|----------------|
| COHERENT SIGNALS (IN-PHASE) | 4 X 5 WATTS |
| COHERENT SIGNALS (180° OUT-OF-PHASE) | 4 X 0.25 WATTS |
| NON-COHERENT SIGNALS | 4 X 0.5 WATTS |
| OTHER CONDITIONS - CONSULT FACTORY | |

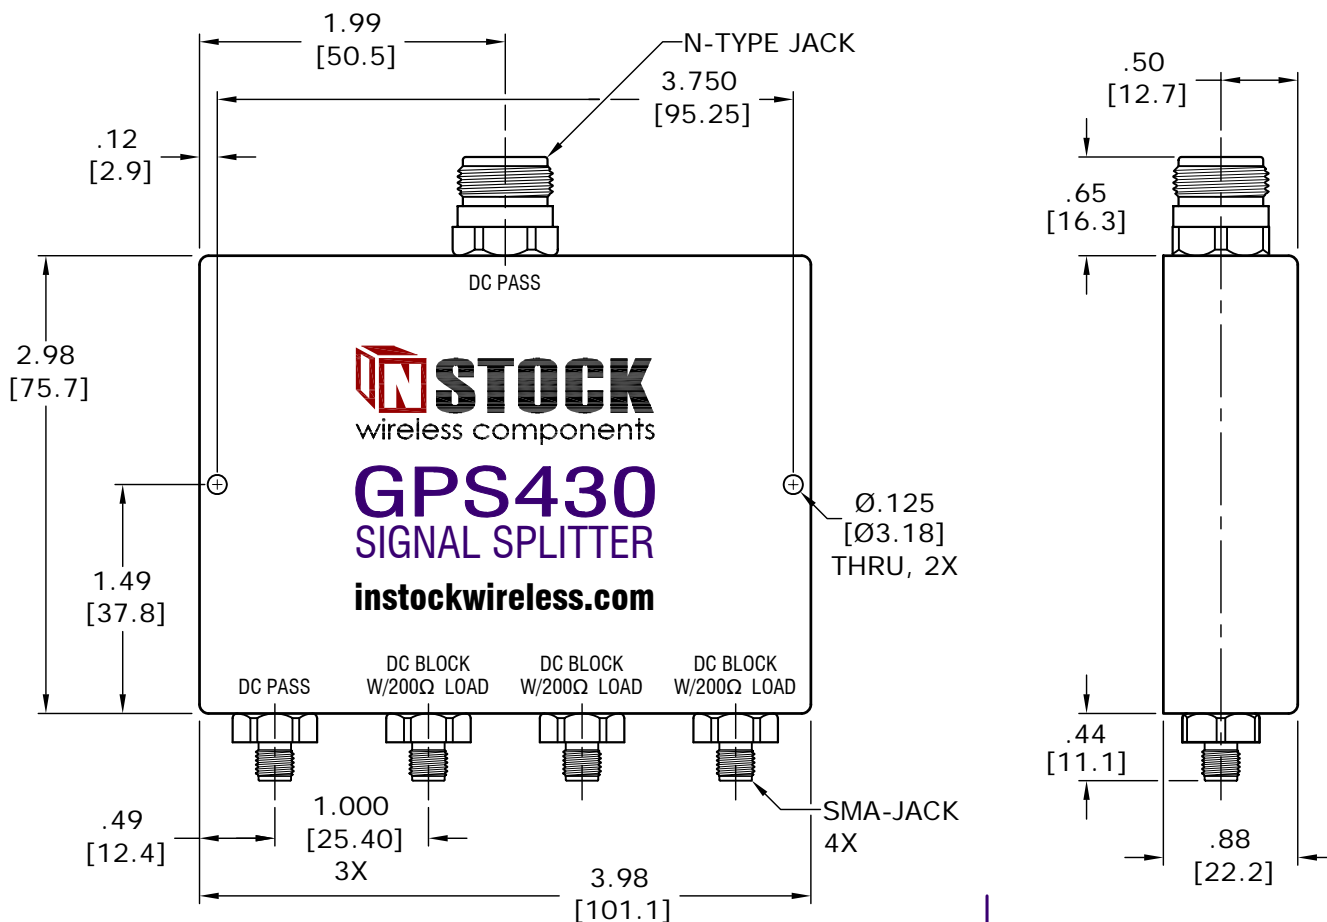

4-way, passive GPS splitter; DC pass 1 port, DC block 3 ports w/200Ω load. Typically used for powering an active antenna thru pass ports while splitting GPS signal 4 ways.

| TOLERANCES | |
|----------------|----------------|
| INCHES | MILLIMETERS |
| .00 = ±.01 | .0 = ±.25 |
| .000 = ±.004 | .00 = ±.10 |
| DRAWN: MJD | APPROVED: EMM |
| DATE: 01/17/13 | DATE: 01/17/13 |



| | |
|-----------|---|
| MODEL NO. | GPS430 |
| TITLE | GPS SPLITTER, 4 WAY, SMA & N-TYPE JACK, 1-2 GHz, 20W, RoHS, DC BLOCK 3 PORTS, WITH 200Ω INTERNAL LOAD |

| REV | DESCRIPTION | BY | DATE |
|-----|-------------|----|------|
| | | | |