

**ELECTRICAL SPECIFICATIONS:**

- 1.) FREQUENCY RANGE: 698 - 2700 MHz
- 2.) IMPEDANCE: 50 OHMS
- 3.) INSERTION LOSS (MAX): 0.6 dB (ABOVE 4.77 dB SPLIT)
- 4.) AMPLITUDE BALANCE (MAX): 0.2 dB
- 5.) PHASE BALANCE (MAX): 3 DEGREES
- 6.) ISOLATION (MIN): 18 dB
- 7.) INPUT VSWR (MAX): 1.35 : 1
- 8.) OUTPUT VSWR (MAX): 1.20 : 1

**MECHANICAL SPECIFICATIONS:**


- 1.) CONNECTORS: N TYPE PLUG & JACK, 50 OHM
- 2.) CONNECTOR BODY: BRASS, TRI-ALLOY PLATE
- 3.) CONNECTOR PIN: BRASS & PHOSPHOR BRONZE, GOLD PLATE
- 4.) INSULATOR: PTFE, VIRGIN ELECTRICAL GRADE
- 5.) HOUSING: ALUMINUM, CLEAR CHEM CONVERSION FILM, RoHS COMPLIANT (NO HEX CHROM)
- 6.) SOLDER: LEAD FREE, RoHS COMPLIANT
- 7.) OPERATING TEMP: -65°C TO +85°C
- 8.) WEIGHT: 360 GRAMS

**RF INPUT POWER RATING (POWER DIVIDER SPLITTER):**

| INTO MATCHED LOAD VSWR's | IN-PHASE | 180° OUT-OF-PHASE |
|--------------------------|----------|-------------------|
| 1.2 : 1                  | 40 WATTS | 40 WATTS          |
| 2.0 : 1                  | 40 WATTS | 20 WATTS          |
| ∞                        | 20 WATTS | 2 WATTS           |

**RF INPUT POWER RATING (POWER COMBINER):**

|                                      |                |
|--------------------------------------|----------------|
| COHERENT SIGNALS (IN-PHASE)          | 3 X 13.3 WATTS |
| COHERENT SIGNALS (180° OUT-OF-PHASE) | 3 X 0.66 WATTS |
| NON-COHERENT SIGNALS                 | 3 X 1.33 WATTS |
| OTHER CONDITIONS - CONSULT FACTORY   |                |

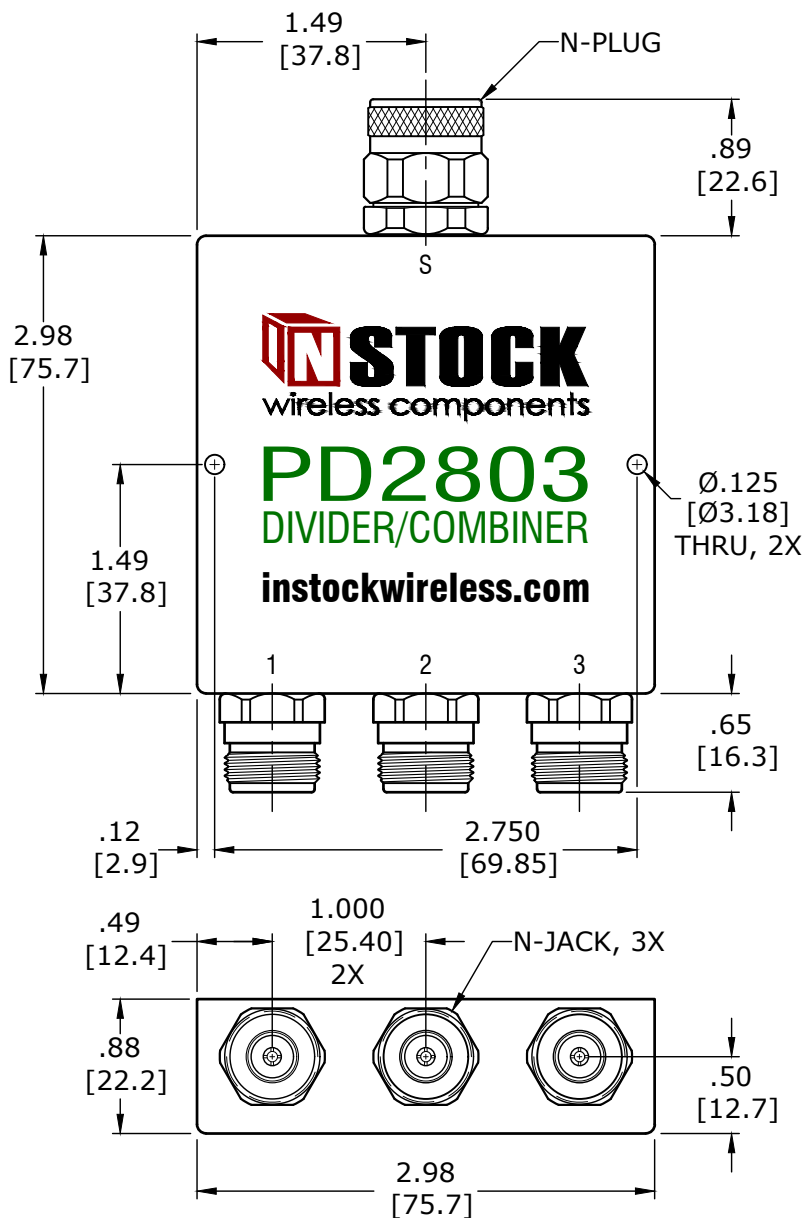

**RoHS**

| REV | DESCRIPTION | BY | DATE |
|-----|-------------|----|------|
|     |             |    |      |

| TOLERANCES     |                |
|----------------|----------------|
| INCHES         | MILLIMETERS    |
| .00 = ±.01     | .0 = ±.25      |
| .000 = ±.004   | .00 = ±.10     |
| DRAWN: MJD     | APPROVED: EMM  |
| DATE: 02/21/12 | DATE: 02/21/12 |

**INSTOCK**  
wireless components  
www.instockwireless.com

|           |  |
|-----------|--|
| MODEL NO. | <b>PD2803</b>  |
| TITLE     | 3 WAY POWER SPLITTER COMBINER, TYPE N, 698 - 2700 MHz, 40 WATTS, 50 OHM, 0 DEGREE (IN-PHASE), RoHS |