

**ELECTRICAL SPECIFICATIONS:**

- 1.) FREQUENCY RANGE: 0.7 - 2.7 GHz
- 2.) IMPEDANCE: 50 OHMS
- 3.) INSERTION LOSS (MAX): 1.5 dB (ABOVE 10.79 dB SPLIT)
- 4.) AMPLITUDE BALANCE (MAX): 0.5 dB
- 5.) PHASE BALANCE (MAX): 8 DEGREES
- 6.) ISOLATION (MIN): 18 dB
- 7.) INPUT VSWR (MAX): 1.45 : 1
- 8.) OUTPUT VSWR (MAX): 1.25 : 1
- 9.) DC VOLTAGE (MAX): 50 VOLTS

**MECHANICAL SPECIFICATIONS:**


- 1.) CONNECTORS: TYPE-N FEMALE (JACK), 50 OHM
- 2.) CONNECTOR BODY: BRASS, TRI-ALLOY PLATE
- 3.) CONNECTOR PIN: PHOSPHOR BRONZE, GOLD PLATE
- 4.) INSULATOR: PTFE, VIRGIN ELECTRICAL GRADE
- 5.) HOUSING: ALUMINUM, CLEAR CHEM CONVERSION FILM, RoHS COMPLIANT (NO HEX CHROM)
- 6.) SOLDER: LEAD FREE, RoHS COMPLIANT
- 7.) OPERATING TEMP: -65°C TO +85°C
- 8.) WEIGHT: 1200 GRAMS

**INPUT POWER RATING (POWER DIVIDER SPLITTER):**

INTO MATCHED LOAD VSWR's	IN-PHASE	180° OUT-OF-PHASE
1.2 : 1	40 WATTS	40 WATTS
2.0 : 1	40 WATTS	40 WATTS
∞	20 WATTS	4 WATTS

**INPUT POWER RATING (POWER COMBINER):**

COHERENT SIGNALS (IN-PHASE)	12 X 3.33 WATTS
COHERENT SIGNALS (180° OUT-OF-PHASE)	12 X 0.33 WATTS
NON-COHERENT SIGNALS	12 X 0.66 WATTS
OTHER CONDITIONS - CONSULT FACTORY	

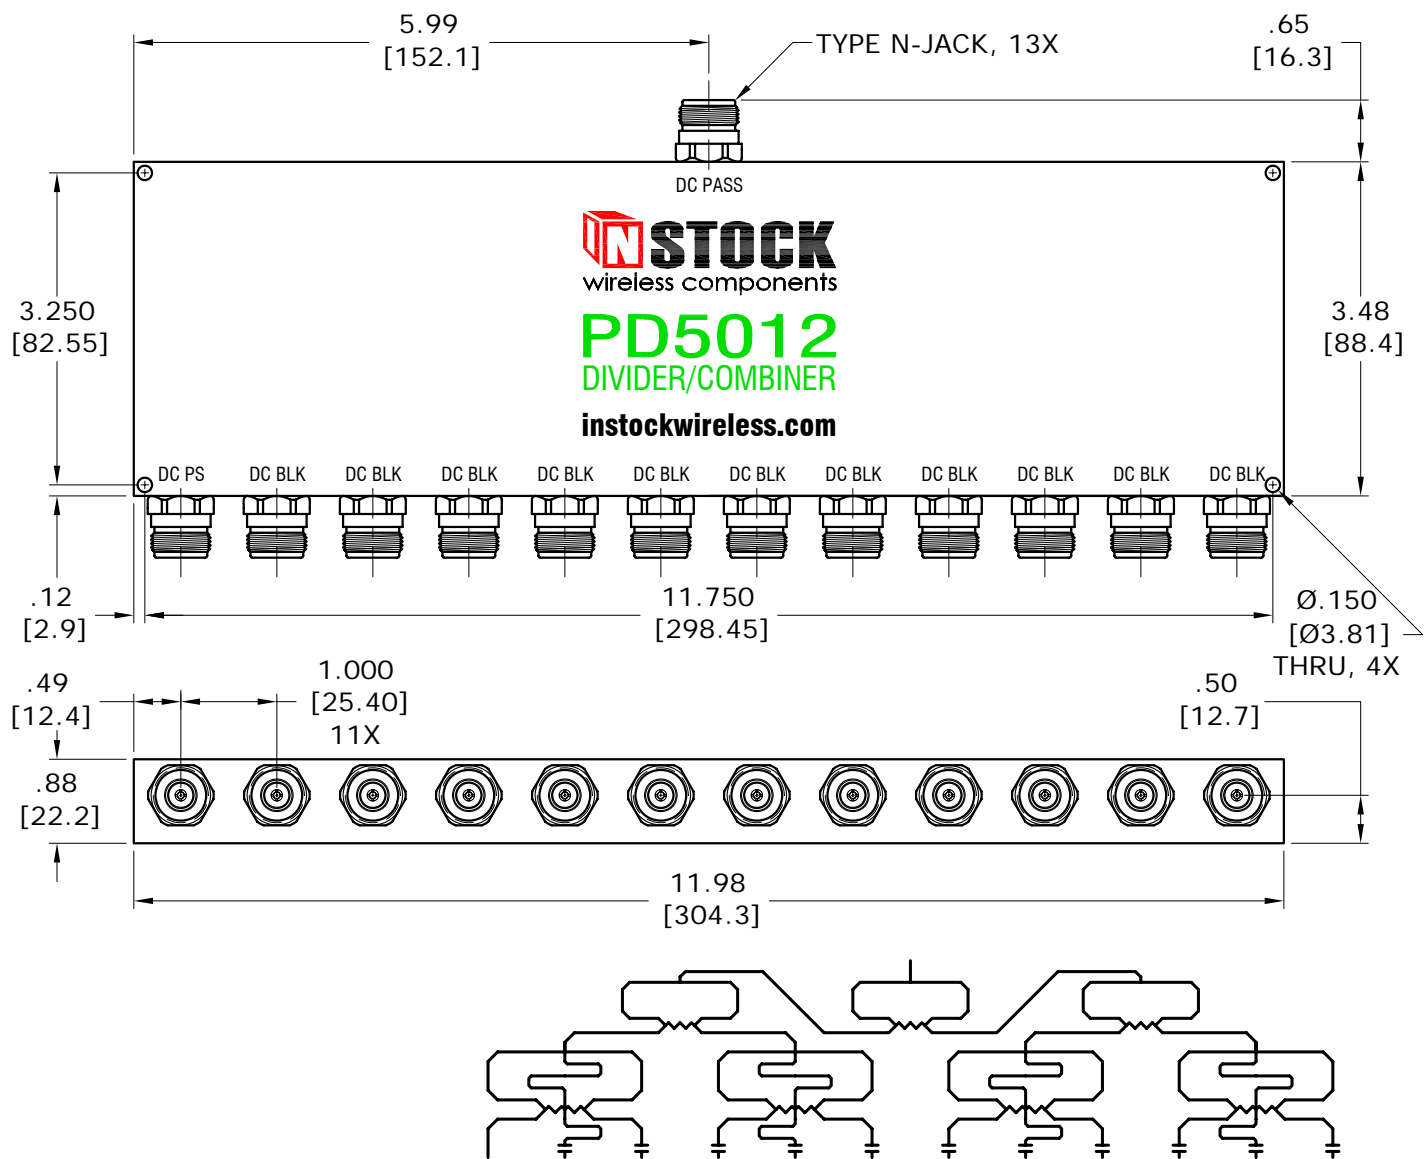

12-way, DC blocking power divider combiner; DC pass 1 port, DC block 11 ports. Typically used for powering an active antenna through the DC pass port.

REV	DESCRIPTION	BY	DATE

TOLERANCES	
INCHES	MILLIMETERS
.00 = ±.01	.0 = ±.25
.000 = ±.004	.00 = ±.10
DRAWN: MJD	APPROVED: EMM
DATE: 12/08/08	DATE: 12/08/08

**INSTOCK**  
wireless components  
www.instockwireless.com

MODEL NO.	<b>PD5012</b>
TITLE	DC BLOCKING POWER DIVIDER, 12 WAY, N-TYPE FEMALE, 0.7 - 2.7 GHz, 40 WATTS, RoHS, DC PASS 1 PORT; BLOCK 11 PORTS.