

ELECTRICAL SPECIFICATIONS:

- 1.) FREQUENCY RANGE: 350 - 1000 MHz
- 2.) IMPEDANCE: 50 OHMS
- 3.) INSERTION LOSS (MAX): 1.8 dB (ABOVE 12.04 dB SPLIT)
- 4.) AMPLITUDE BALANCE (MAX): 0.6 dB
- 5.) PHASE BALANCE (MAX): 8 DEGREES
- 6.) ISOLATION (MIN): 20 dB
- 7.) INPUT VSWR (MAX): 1.50 : 1
- 8.) OUTPUT VSWR (MAX): 1.20 : 1

MECHANICAL SPECIFICATIONS:


- 1.) CONNECTORS: TYPE-N FEMALE (JACK), 50 OHM
- 2.) CONNECTOR BODY: BRASS, TRI-ALLOY PLATE
- 3.) CONNECTOR PIN: PHOSPHOR BRONZE, GOLD PLATE
- 4.) INSULATOR: PTFE, VIRGIN ELECTRICAL GRADE
- 5.) HOUSING: ALUMINUM, CLEAR CHEM CONVERSION FILM, RoHS COMPLIANT (NO HEX CHROM)
- 6.) SOLDER: LEAD FREE, RoHS COMPLIANT
- 7.) OPERATING TEMP: -65°C TO +85°C
- 8.) WEIGHT: 1920 GRAMS

RF INPUT POWER RATING (POWER DIVIDER SPLITTER):


INTO MATCHED LOAD VSWR's	IN-PHASE	180° OUT-OF-PHASE
1.2 : 1	30 WATTS	30 WATTS
2.0 : 1	30 WATTS	30 WATTS
∞	15 WATTS	6 WATTS

RF INPUT POWER RATING (POWER COMBINER):

COHERENT SIGNALS (IN-PHASE)	16 X 1.875 WATTS
COHERENT SIGNALS (180° OUT-OF-PHASE)	16 X 0.375 WATTS
NON-COHERENT SIGNALS	16 X 0.75 WATTS
OTHER CONDITIONS - CONSULT FACTORY	

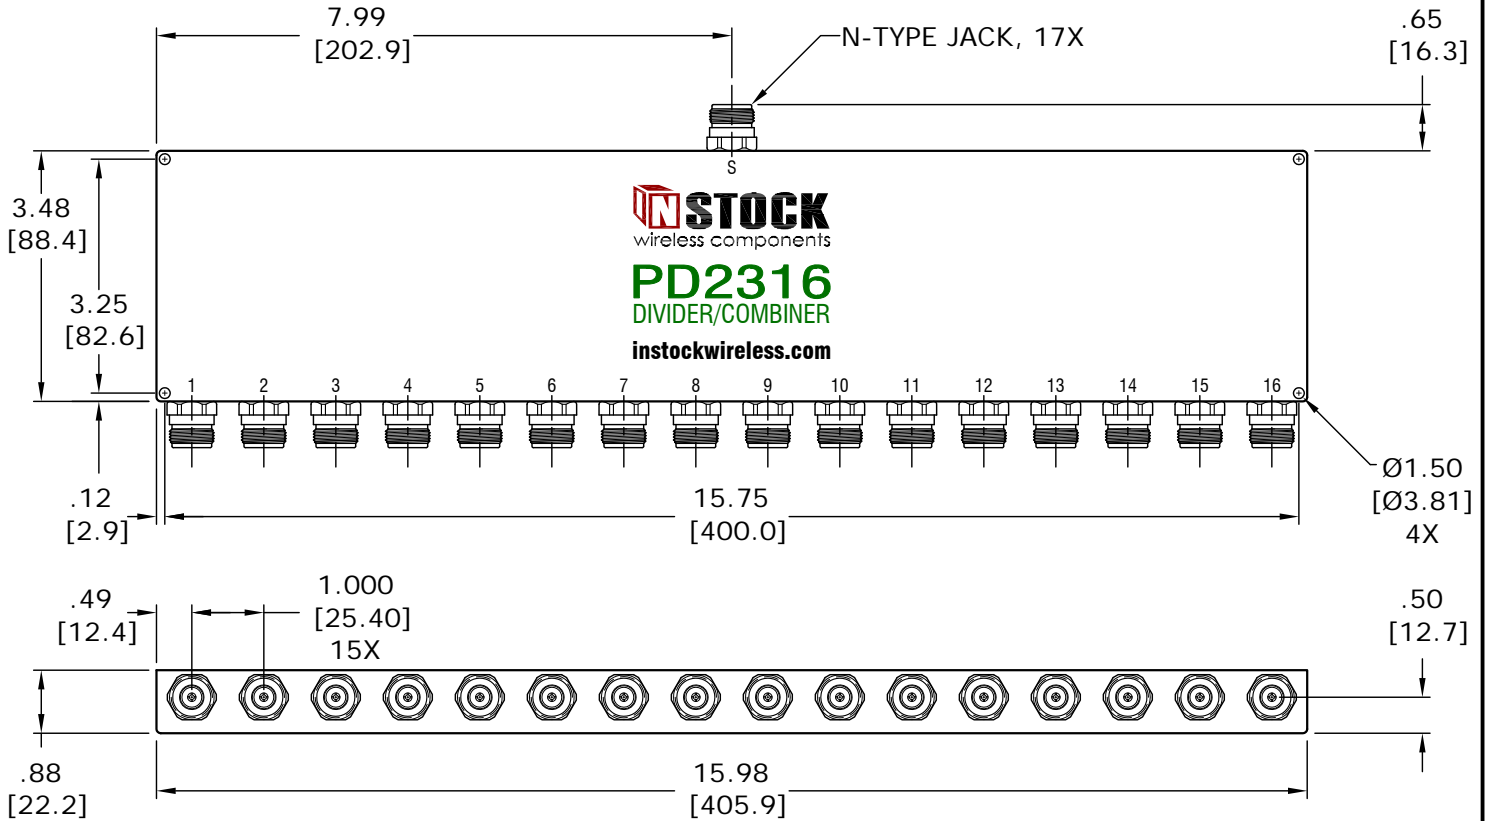

RoHS

REV	DESCRIPTION	BY	DATE	TOLERANCES		 MODEL NO. PD2316
				INCHES	MILLIMETERS	
				.00 = ±.01	.0 = ±.25	16 WAY POWER DIVIDER COMBINER, TYPE N FEMALE, 350-1000 MHz, 30W, 50 OHM, 0 DEGREE (IN-PHASE), RoHS
				.000 = ±.004	.00 = ±.10	
				DRAWN: MJD	APPROVED: EMM	
				DATE: 01/24/08	DATE: 01/24/08	www.instockwireless.com